

Information

MAC Address :00-1D-34-04-04-83

Serial Number :13130039

Firmware Version : Ver 0302

Hardware Version : Ver 0470

IP:192.168.1.58 [shinaashu_軒子橋]

Basic | Network | Operating Mode | Accessible IPs | Password | Serial |

Device Name : SY330-NET

Device ID : 0001

RS485 Setup

RS485 START DELAY: 0 100 ~ 9999 us

RS485 END DELAY: 0 100 ~ 9999 us

Enable Local TCP Port: 5001 for SYW95A-NET

Enable Local TCP Port: 5002 for SYW95A-NET

Configuration

Information

MAC Address :00-1D-34-04-04-83

Serial Number :13130039

Firmware Version : Ver 0302

Hardware Version : Ver 0470

IP:192.168.1.58 [shinaashu_軒和園]

- Basic
- Network**
- Operating Mode
- Accessible IPs
- Password
- Serial

DHCP

Static IP

IP address:

Subnet mask:

Default gateway:

DNS server1:

DNS server2:

UPnP

MAC Address Filter

No data transmission auto reset : min

 **OK (Write)**

 **Cancel**

Information

MAC Address :00-1D-34-04-04-83

Serial Number :13130039

Firmware Version : Ver 0302

Hardware Version : Ver 0470

IP:192.168.1.58 [shinaashu_軒轅]

Basic | Network | **Operating Mode** | Accessible IPs | Password | Serial

TCP Server Mode
 Local TCP Port: 5001 Max Connection: 4

TCP Client Mode Connect Mode: **Stop**

Destination IP 01: 0 0 0 0 Port: 5001

Destination IP 02: 0 0 0 0 Port: 5001

Destination IP 03: 0 0 0 0 Port: 5001

Destination IP 04: 0 0 0 0 Port: 5001

UDP Mode

Local TCP Port: 5001

Destination IP 01: 0 0 0 0 Port: 5001

Destination IP 02: 0 0 0 0 Port: 5001

Destination IP 03: 0 0 0 0 Port: 5001

Destination IP 04: 0 0 0 0 Port: 5001

Data Packing(Optional)

Delimiter 1 0D (0 - ff,Hex)

Delimiter 2 00 (0 - ff,Hex)

Force Tx Timeout: 10 (0 - 65535 ms)

Miscellaneous(Optional)

TCP Alive Check Timeout
0 (0 - 255 min)

Inactivity Timeout
0 (0 - 65535 ms)

OK (Write)

Cancel

Configuration

Information

MAC Address :00-1D-34-04-04-83

Serial Number :13130039

Firmware Version : Ver 0302

Hardware Version : Ver 0470

IP:192.168.1.58 [shinaashu_軒和園]

- Basic
- Network
- Operating Mode
- Accessible IPs**
- Password
- Serial

<input type="checkbox"/> Accessible IP 01:	0	0	0	0
<input type="checkbox"/> Accessible IP 02:	0	0	0	0
<input type="checkbox"/> Accessible IP 03:	0	0	0	0
<input type="checkbox"/> Accessible IP 04:	0	0	0	0

✓ OK (Write)

✗ Cancel

Configuration

Information

MAC Address :00-1D-34-04-04-83

Serial Number :13130039

Firmware Version : Ver 0302

Hardware Version : Ver 0470

IP:192.168.1.58 [shinaashu_軒和園]

- Basic
- Network
- Operating Mode
- Accessible IPs
- Password
- Serial

Serial: 115200,n,8,1

✓ OK (Write)

✗ Cancel

controller Setting

Name:

Active

APB Movements at OneTime

controller ID:

controller S/N:

controllerType:

Mode Name:

controller Position:

Description:

controller Port:

ServerIP:

Server Port:

Controller Setting

LinkAction Setup

Controller | Module | DI | DO | Door

Controller Name: APB Movement L

Enable Mode:


Controller ID: Controller Port:

Controller No: Controller Type:

Controller Site: Description:

Controller Name	DeviceEnable	DeviceID	DeviceSERIAL	DeviceMode	DevicePortN	DeviceType	Site	Description
▶ Device unit #	<input checked="" type="checkbox"/>	1		RealTime	192.168.1.101	SY2xxNT,SY		

Edit

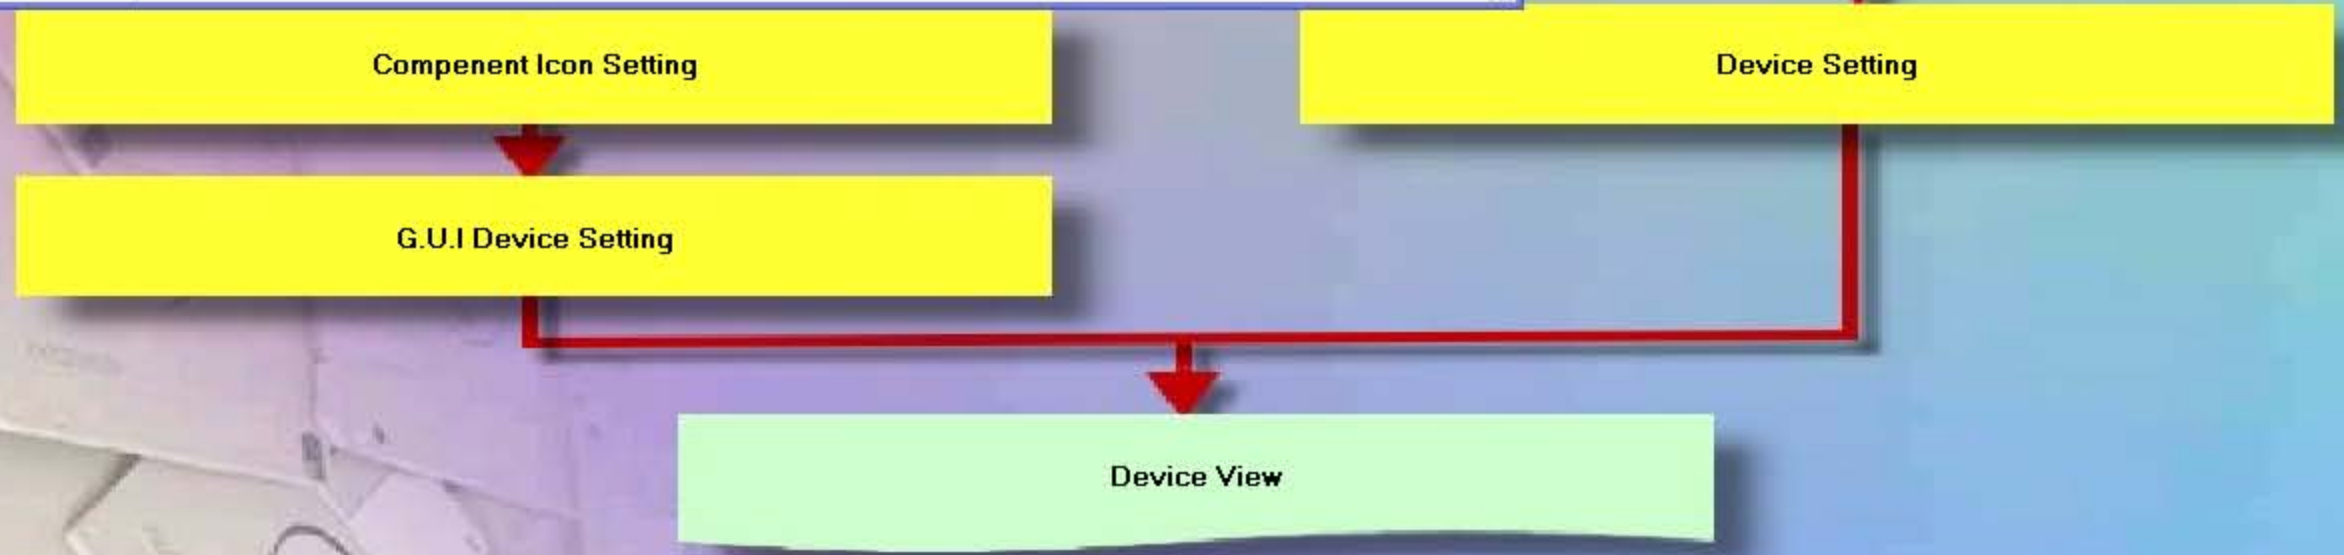

Enter&Exit On-line

Door1 #1-1-1 00:05 Manual Open Close Local

Emergency	Open	Close	Group	1	2	3	4	5	6	7	8	9	10
-----------	------	-------	-------	---	---	---	---	---	---	---	---	---	----

20 13.09.23
11:26:38 MON AM

CardHolder Enter | CardHolder Exit | Enter&Exit | AlarmStatus | Comm. Failure | **Controller RealTime** | Door Status | Remote Control | DI/DO Active

Controller name	Controller time
Device unit #1	2013/9/23 11:26:37

2013年9月

星期日	星期一	星期二	星期三	星期四	星期五	星期六
25	26	27	28	29	30	31
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30	1	2	3	4	5

今天: 2013/9/23

Year: 2013 Month: 09 Day: 23

[HH]Zero [MM]Zero [SS]Zero

11 26 38

Refresh DateTime

Update DateTime

Synchronize

Enter: 00000 Exit: 00000

Loud Voice Action Display Refresh